## SIEMENS

## **Product data sheet**

5SY6332-7

CIRCUIT BREAKER 400V 6KA, 3-POLE, C,


32A, D=70MM



Similar to image

Technical data:		
Overvoltage class		3
type of voltage	-	AC/DC
Tripping characteristic class	-	С
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		3
Number of pitch units for width		3
Product function / n-switching		No
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	15
Breaking capacity current / acc. to EN 60898 / rated value	kA	6
Supply voltage / for AC / rated value	V	400
Current / for AC / rated value	А	32
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-

Operational voltage Um		-
rated current In		-
Rated make-break capacity Icn		-
Rated service short-circuit breaking capacity Ics		-
Rated ultimate short-circuit breaking capacity Icu		-
Tripping characteristics Number		-
Tripping characteristic/-class Conventional tripping current I2, (x In)		-
rated current In IEC, DIN/VDE		-
Tripping characteristic/-class Test current I4, hold (x In)		-
rated current In / IEC, DIN/VDE		
• at 30 Cel	А	32
• at 40 Cel	А	30.72
• at 45 Cel	А	29.76
• at 50 Cel	А	28.8
• at 55 Cel	А	27.84
• at 60 Cel	А	26.88
Resistance against shock / according to IEC 60068-2-27		150m/s <sup>2</sup> at 11ms half-sine

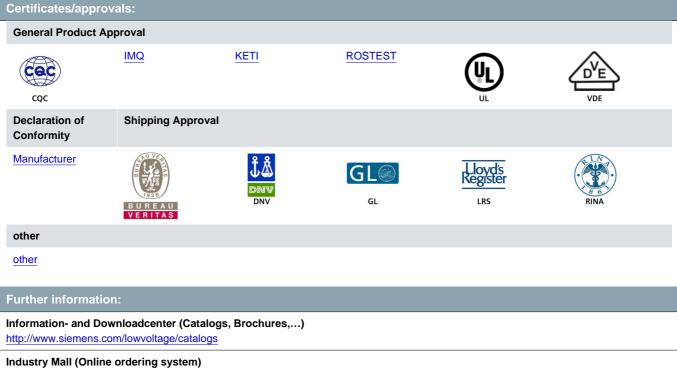


http://www.siemens.com/lowvoltage/mall


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/5SY6332-7/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=5SY6332-7

## CAx-Online-Generator

http://www.siemens.com/cax



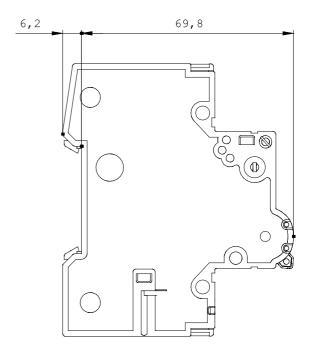

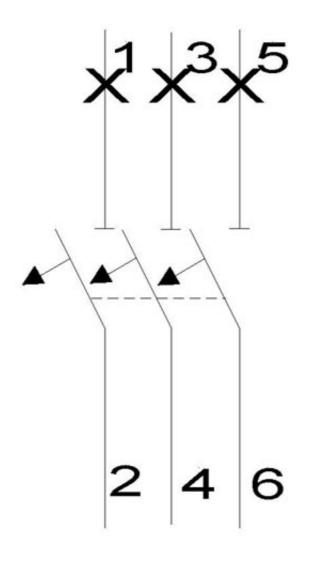

last change:

Nov 3, 2011