

ViewSonic®  PROJECTOR
PX701HDH


Key Features

- 3,500 ANSI Lumens with native Full HD 1080p
- Energy-efficient SuperEco+ Mode for lamp life up to 20,000hrs
- Vertical lens shift
- vColorTuner to exchange color profile and adjustment easier
- Projector software update tool to easily upgrade your functionality up to date



Product Description

The ViewSonic PX701HDH is a high brightness 3,500 ANSI lumens projector featuring a Full HD 1080p resolution that offers impressive visual performance in a brightly lit living room or meeting room. The projector adopts the latest lamp design to extend lamp life of up to 20,000 hours under SuperEco+ mode, effectively reducing lamp replacement and maintenance costs. A digital lens shift allows users to make adjustments by remote control, it's also compatible with the vColorTuner function for color profile exchange and adjustments. The dual HDMI inputs and USB power supply allow users to connect to a multitude of multimedia devices for gaming, movies, or a wireless dongle for wireless presentation.

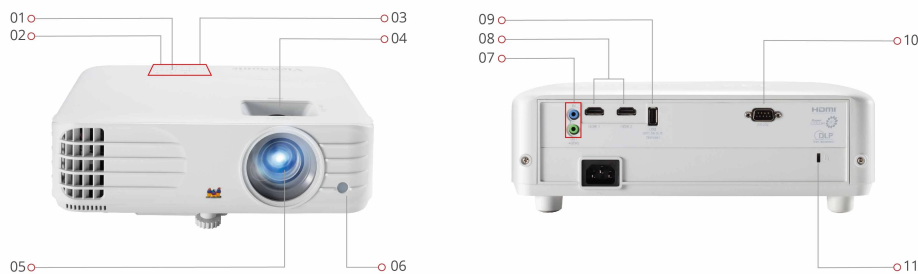

1. Keypad
2. LED Indicator
3. Power Key
4. Zoom/Focus
5. Projection Lens
6. Front IR
7. Audio In/Out

8. HDMI
9. USB Type A
10. RS232
11. Kensington Lock

Visit Us ■ www.viewsonic.com

SPECIFICATION

Native Resolution:	1920x1080
DMD Type:	DC3
Brightness:	3500 (ANSI Lumens)
Contrast Ratio with SuperEco Mode:	12000:1
Display Color:	1.07 Billion Colors
Light Source Type:	Lamp
Light Source Life (hours) with Normal Mode:	5000
Light Source Life (hours) with SuperEco Mode:	20000
Lamp Watt:	203W
Lens:	F=2.0-2.05, f=15.843-17.445mm
Projection Offset:	110%+/-6%
Throw Ratio:	1.5-1.65
Optical Zoom:	1.1x
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	1m-10.96m(100"@3.32m)
Keystone:	+/- 40° (V)
Lens Shift V. Range:	+/- 5% (Digital)
Audible Noise (Normal):	31dB
Audible Noise (Eco):	27dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to WUXGA_RB(1920 x 1200)*RB-Reduced Blanking
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz
INPUT	
HDMI:	2 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1
OUTPUT	
Audio-out (3.5mm):	1
Speaker:	10W
USB Type A (Power):	1 (5V/1.5A)
CONTROL	
RS232 (DB 9-pin male):	1
USB Type A (Services):	1(share with USB A Output)

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz(AC in)
Power Consumption:	Normal: 300WStandby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.59kg
Gross Weight:	3.75kg
Dimensions (WxDxH) with Adjustment Foot:	312x222x108mm
Packing Dimensions:	415x168x297mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages
User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, Total 20 languages
STANDARD ACCESSORY	
Power Cord:	1
Remote Control:	1
QSG:	Yes
Warranty Card:	Yes (CN Only)
OPTIONAL ACCESSORY	
Lamp/Light Source:	RLC-119
Wall/Ceiling Mount:	PJ-WMK-007
Carry Bag:	PJ-CASE-008