

# LogiLink®

## 4K 1x1 HDMI™ Audio Extractor ARC, 4K/60 Hz

Art. No.: HD0055



This upgraded audio extractor supports video resolution up to 4K@60 Hz and audio outputs through SPDIF or 3.5 mm stereo. It also supports ARC function, easily connect it to an ARC compatible TV. Allowing you to output audio signal to external audio systems.

### Features:

- » Converts digital HDMI signals to analog and digital Audio (HDMI, SPDIF & 3.5 mm)
- » ARC function offers two-way communication between devices over a single HDMI connection
- » Supports 2.0 CH/5.1 CH/PASS audio switching
- » Supports UHD 4K@60 Hz (YUV 4:4:4), Full 3D and 12-bit deep color
- » Supports HDCP 2.2
- » Supports HDR and CEC
- » Supports HDMI output audio format: DTS-HD Master Audio™/Dolby TrueHD
- » Plug and play, no drivers needed


### Front



### Back



- (a) HDMI output port
- (b) 3.5 mm stereo audio output
- (c) S/PDIF audio output port
- (d) ARC function on/off switch button
- (e) HDMI input port
- (f) PASS/2.0 CH/5.1 CH switch button for selecting the audio format
- (g) ARC status LED (blue)
- (h) Power LED (Blue)
- (i) DC 5 V input

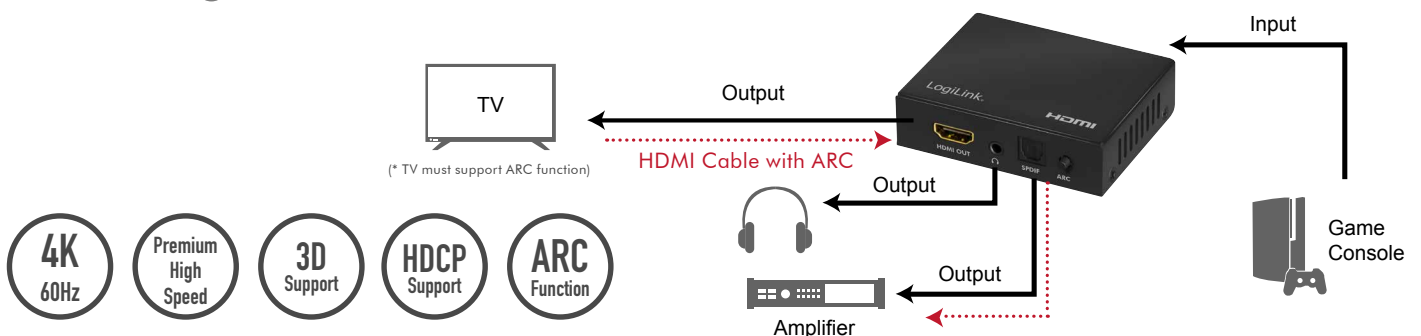

\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

.....➔ ARC audio signal flow

## Specifications:

Input Ports	1x HDMI-A female, 1x DC power jack
Output Ports	2x HDMI-A female, 1x SPDIF, 1x stereo jack
HDMI Version	2.0
HDCP Version	2.2
HDMI ARC	Yes
HDMI CEC	Yes
HDMI HDR	Yes
Output Resolution	480i/60 Hz, 576i/50 Hz, 1080i/50/60 Hz, 480p/60 Hz, 576p/50 Hz, 720p/50/60 Hz, 1080p/24/25/30/50/60 Hz, 4K@24/25/30 Hz, 4K@50/60 Hz
Video Bandwith	6 Gbps/600 MHz
3D Supporting	Yes
Input and output DDC signal	Yes
SPDIF Interface	Yes
Chassis Material	Metal
LED Indicator	Yes
Power Consumption	5 W max.
Power Supply	5 V/1 A
Uncompressed Audio	LPCM 7.1
Compressed Audio	HDMI: DTS-HD Master Audio™, Dolby TrueHD SPDIF: DTS/Dolby Digital
Operating Temperature	0°C–70°C
Operating Humidity	10%–85% RH (no condensation)
Storage Temperature	-10°C–80°C
Storage Humidity	5%–90% RH (no condensation)
Dimensions	7.8x6x2 cm
Weight	0.123 kg

## Specification of External Power Supply:

Input Voltage	100–240 V, 50/60 Hz 0.2 A max.
Output Power	5 V/1 A, 5 W
DC Plug	3.5x1.35 mm
Dimensions	51x35x59 mm
Cable Length	1.2 m
Weight	0.07 kg



## Package Contents:

- » 1x 4K 1x1 HDMI Audio Extractor
- » 1x Power Adapter 5 V/1 A
- » 1x User Manual

## Package Information:

- » Packing Dimension: 160x107x50 mm
- » Packing Weight: 0.27 kg
- » Carton Dimension: 575x255x345 mm
- » Carton Q'ty: 40 pcs
- » Carton Weight: 11.5 kg



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

