

LogiLink®

USB 3.2 Gen 1 USB-C™ Docking Station

10-Port, 100 W USB-PD

Art. No.: UA0383



Expand Your Laptop Capabilities


This USB-C Docking Station is a portable and lightweight 10-in-1 expansion dock; simply connect projectors, 4K monitors, SD cards, headsets and USB flash drives on your USB-C laptop. The extra USB-C PD port keeps your laptop charging while still providing power to each external device. Ideal for increasing your work efficiency and making life easier.



10-in-1 Expansion

Instantly expand your USB-C laptop with:

- 1x RJ45 Gigabit Ethernet port
- 1x VGA output port
- 3x USB 3.0 ports
- 1x 3.5mm audio port
- 1x Micro SD card slot
- 1x SD card slot
- 1x HDMI output port
- 1x USB-C PD 100 W

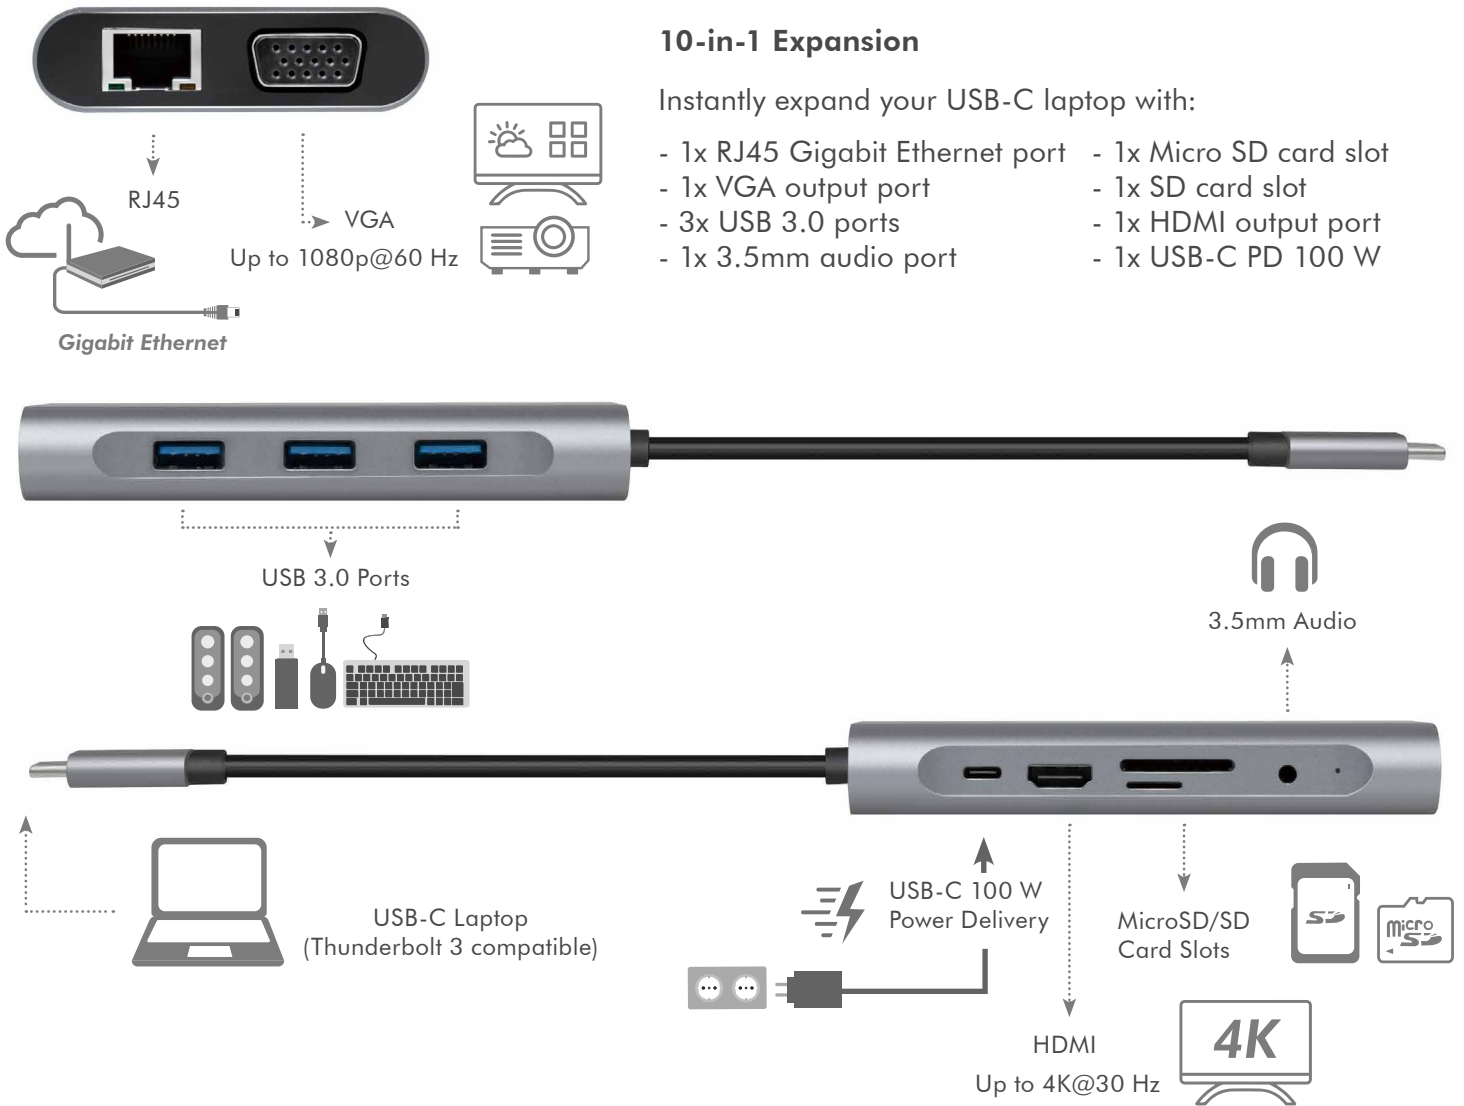

Convenient USB-C Charging

Power supply via the 100 W USB-C Power Delivery port for keeps your laptop fully charged while you're using all the other devices on the docking.

Fast Data Transfer

Connect your laptop via the USB-C port (Thunderbolt 3 compatible) to give you extra ports to connect your peripherals. Quick data transfer speeds up to 5 Gbps.

Steady Internet Performance

RJ45 Gigabit Ethernet Network Port provides stable and fast network transmission. (10M/100M/1000Mbps)

Crystal Clear & Simultaneous Video Output

Extend up to two monitors through one HDMI port and one VGA port at the same time. Easily stream videos to a HDTV, monitor, or projector; enjoy your crisp and colorful pictures.



Wide Compatibility

Works with all USB-C (Thunderbolt 3 compatible) laptops, computers and tablets; fully compatible with Windows and Mac OS.



Specification:

| | |
|------------------------|--|
| Input | USB-C plug, USB-C PD charging port |
| Output | 3x USB 3.0, 1x VGA, 1x HDMI, 1x RJ45, 1x Micro SD card slot, 1x SD card slot, 1x 3.5mm audio |
| Max. Output | USB-C PD charging port: 100 W@20 V/5 A USB 3.0 ports (total output): 7.5 W@5 V/1.5 A |
| Max. Resolution | HDMI: 3840x2160@30 Hz VGA: 1920x1080p@60 Hz |
| Data Transmission Rate | USB 3.0: 5 Gbps SD/SDHC/SDXC: 2 TB |
| Supported Bandwidth | 10/100/1000 Mbps |
| Operating Temperature | 0–45 °C |
| Storage Temperature | -20–70 °C |
| Operating Humidity | 10–85% RH (No condensation) |
| Storage Humidity | 5–90% RH (No condensation) |
| Attached Cable Length | 12 cm |
| Dimensions | 11.5x6.22x1.65 cm |
| Weight | 97.6 g |

Package Contents:

- » 1x USB 3.2 Gen 1 USB-C Docking Station
- » 1x User Manual

Package Information:

- » Packing Dimension: mm
- » Packing Weight: kg
- » Carton Dimension: mm
- » Carton Q'ty: pcs
- » Carton Weight: kg



⚠ Proper use of the PD function can only be guaranteed in combination with certified USB cables with E-Mark chipset.

*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



UA0383



Made in China