




PRIME
TITANIUM

SPECIAL FEATURES

- ❖ Ultra-High Efficiency, 80 PLUS® Titanium Certified
- ❖ Seasonic Fanless Design
- ❖ Micro Tolerance Load Regulation
- ❖ Fully Modular Cabling Design
- ❖ Multi-GPU Technologies Supported
- ❖ Gold-Plated High Current Terminals

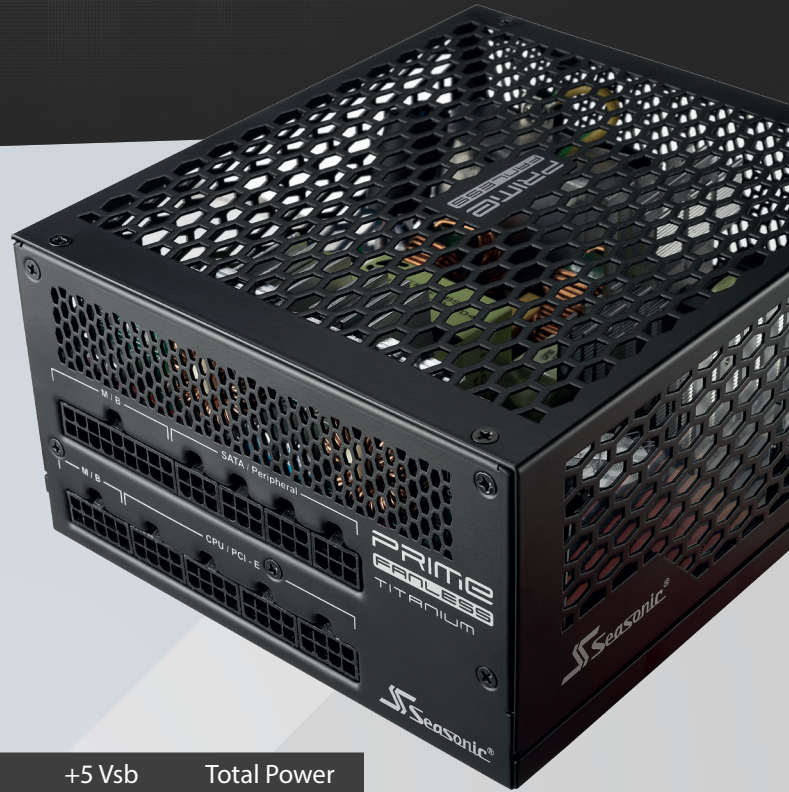

POWER DISTRIBUTION

Model	+3.3 V	+5 V	+12 V	-12 V	+5 Vsb	Total Power
PRIME 600	20 A	20 A	50 A	0.3 A	2.5 A	600 W
Titanium						
Fanless	100 W		600 W	3.6 W	12.5 W	



WIRE CONFIGURATION

Cable						
Model	Main Power (24P / 20P) 610 mm	EPS 12 V / ATX 12 V (8P / 4P) 650 mm	PCI-E (8P / 6P)	SATA	Peripheral (4P)	FDD (4P)
PRIME 600						
Titanium	1	2	4	6	5	1
Fanless						



Safety & EMI / EMC

Protection Features: OPP / OVP / UVP / SCP / OCP / OTP

Dimensions: L 170 x W 150 x H 86 mm



Specifications may change without prior notice



Headquarters Tel: +886-2-2659-0338 | Fax: +886-2-2659-0530 | sales@seasonic.com | www.seasonic.com
USA Tel: +1 626-969-9966 | Fax: +1 626-969-9986 | ssa.sales@seasonic.com
Europe sse.sales@seasonic.com
Japan Tel: +81-3-6805-4085 | ssj.sales@seasonic.com