

NOIR


USER MANUAL

1. Specifications
2. Chassis Parts
3. Control Panel Functions
4. 3.5"HDD/ 2.5" SSD Installation
5. Cooling System Installation
6. Remove the Front Panel Instructions
7. RGB Lighting Switching
8. Fan Installation

Specifications


Model	
Model Name:	NOIR
Model Number	CSAZ-130
Specifications	
Type:	Micro ATX Mid Tower
Color:	Black(exterior)/black(interior)
Side Panel Window:	Left side panel: tempered glass with rubber mounts
Max CPU Cooler Height:	UP to 165mm
Max GPU Length	Up to 300mm long video card
Power Supply Support:	Bottom mounted ATX Power Supply
Motherboard Compatibility:	Micro ATX
Expansion	
External 5.25" Drive Bays:	0
Internal 2.5" Drive Bays:	Up to 6
Internal 3.5" Drive Bays:	Up to 2
Expansion Slots:	4
Top Ports:	Power button, LED button, HD Audio, USB 3.0 x 1, USB2.0x2
Physical Specifications	
Case Dimension (HxWxD)	397x215x404mm/15.6x8.5x16 inches
Weight:	4.3kg /9.5lbs
Features	
Outer Appearance:	High-quality tempered glass side window allows for clear visuals to inner components
Addressable RGB Light Effects:	All ARGB light devices sync with the motherboard, allowing the motherboard software or LED button to directly control the lighting.
Available Fan Ports:	3x120mm fan ports in the front (1 x 120mm LFO-3212D ARGB fan included) 2x120mm or 2x140mm fan ports on the top 1x120mm fan port in the rear(1 x 120mm LFO-3212D ARGB fan included)
Water Cooling:	Supports radiators up to 240mm in the front
Dust Filters	Removable (magnetic) dustproof net on the top, iron net on bottom of chassis.



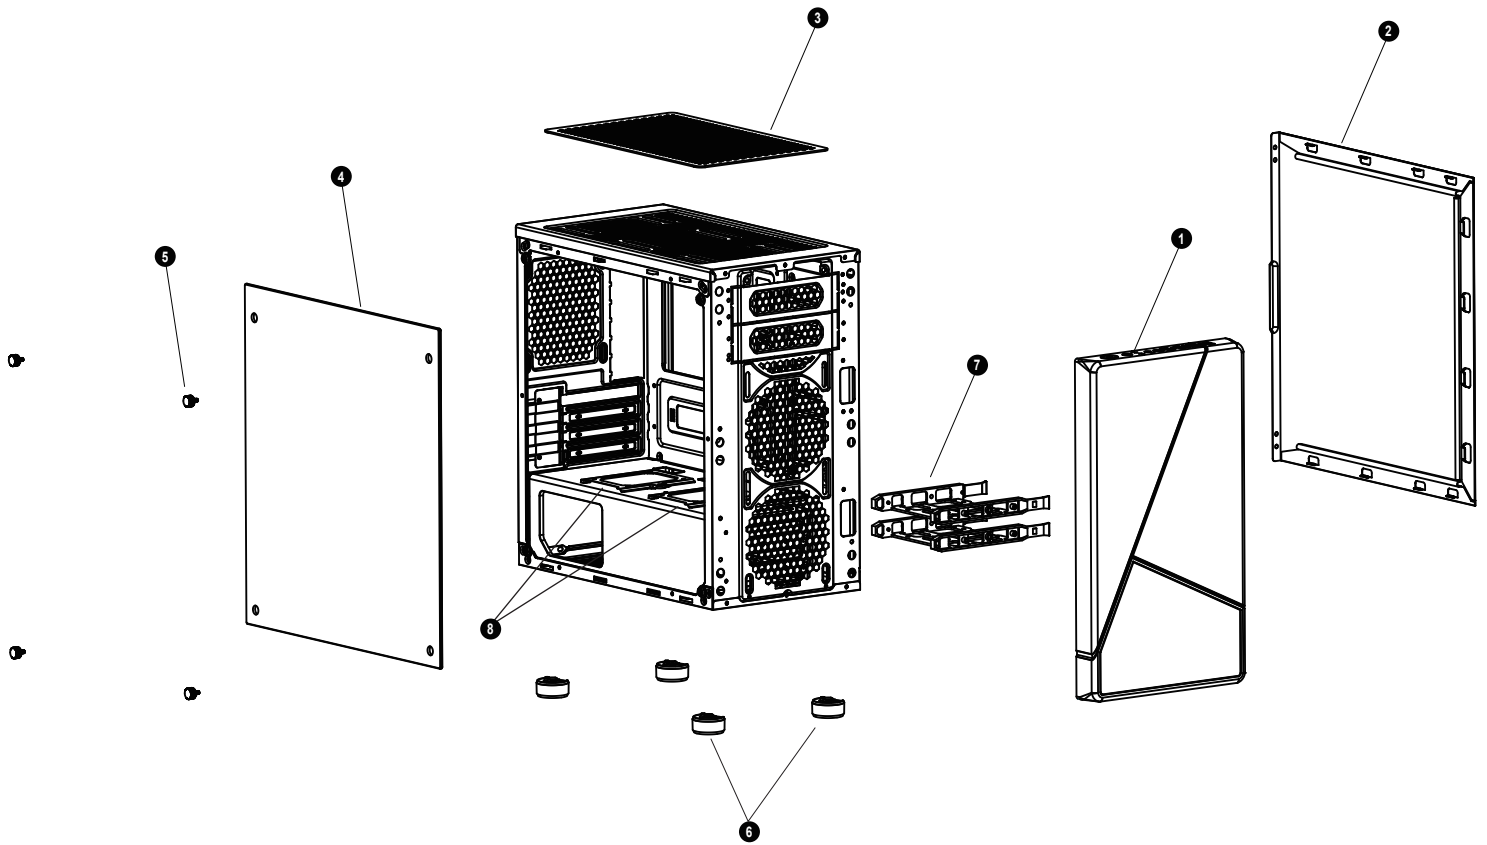





Chassis Parts

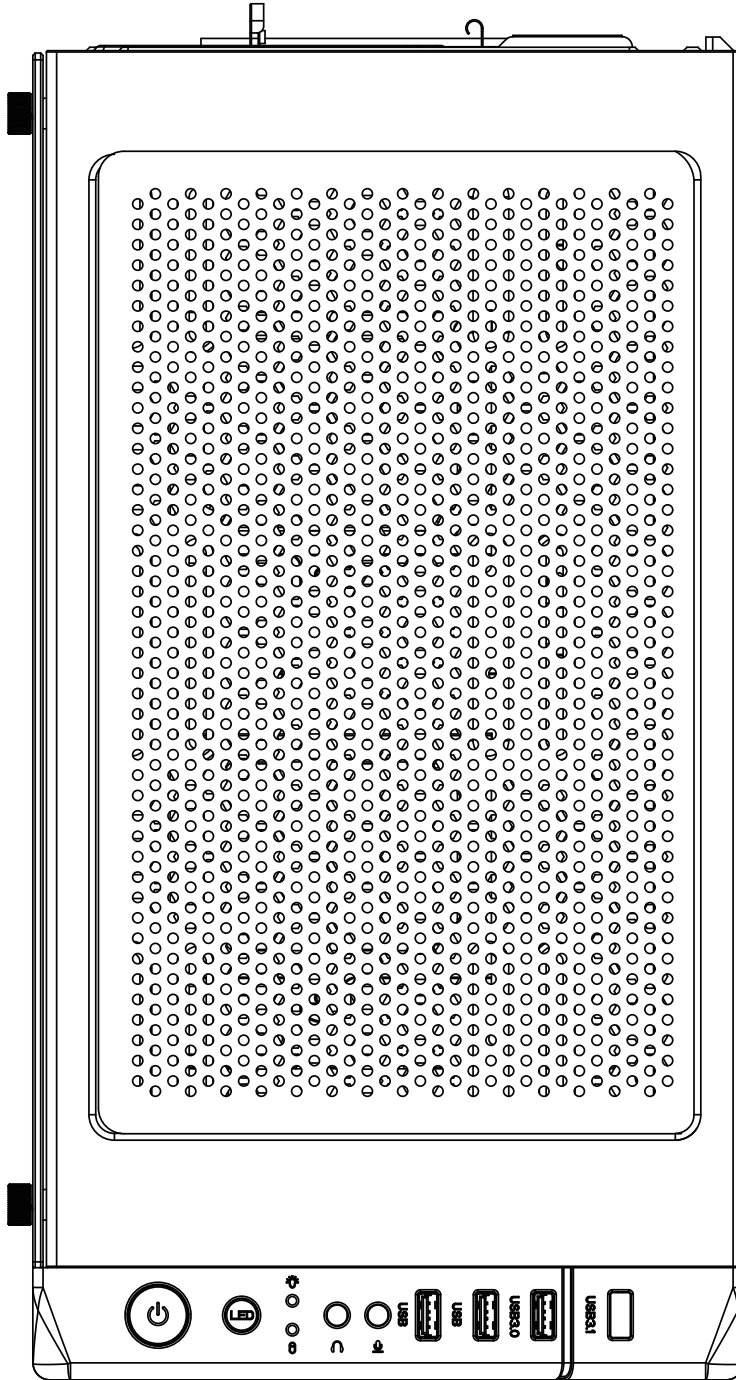


1	Front panel
2	Right side panel
3	Removable (magnetic) dustproof net
4	Left side tempered glass panel
5	Screws for side glass panel
6	Case feet
7	3.5"HDD brackets X2
8	2.5"SSD brackets X2

Control Panel Functions




	Power button		Mic
	LED changes button		Audio
	Power Indicator		USB2.0
	Hard disk Indicator		USB3.0(Blue)

3.5" HDD/ 2.5" SSD Installation

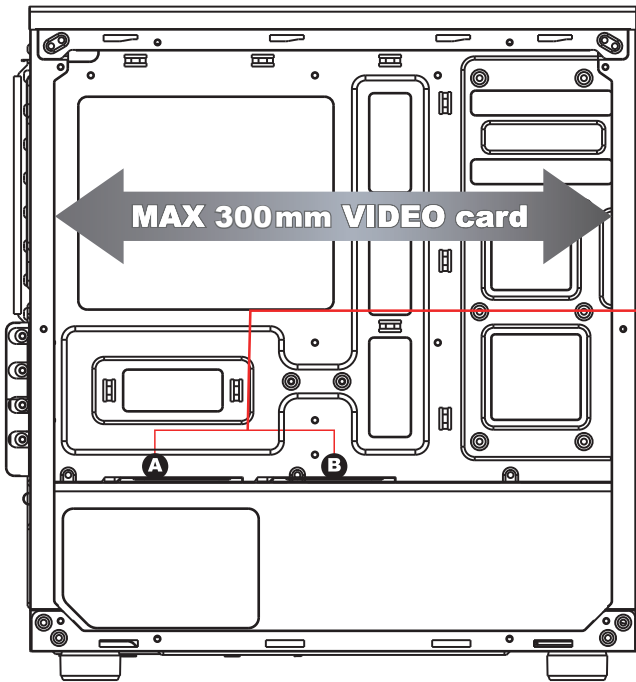


▪ Supports up to 300mm long video cards.



2.5" SSD brackets X2




or

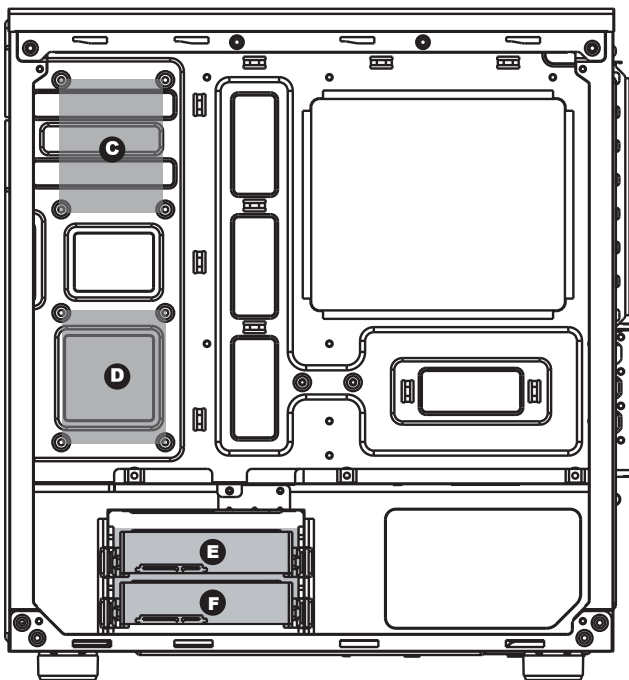


▪ Two brackets support 2.5" devices.
(A B)

▪ Two mounting holes support 2.5" devices.
(C D)


▪ Two multifunctional trays support 3.5" HDD or 2.5" SSD.
(E F)

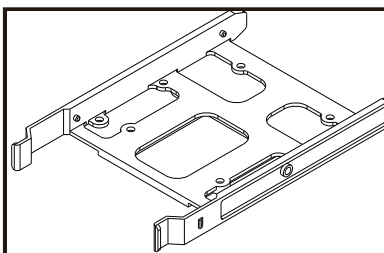

Multifunctional bracket.

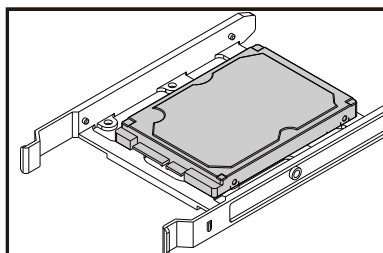


Secure 2.5" SSD / HDD with screws.

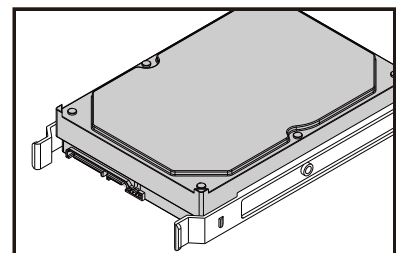


Secure 3.5" HDD with screws.

Cooling System Installation


Front

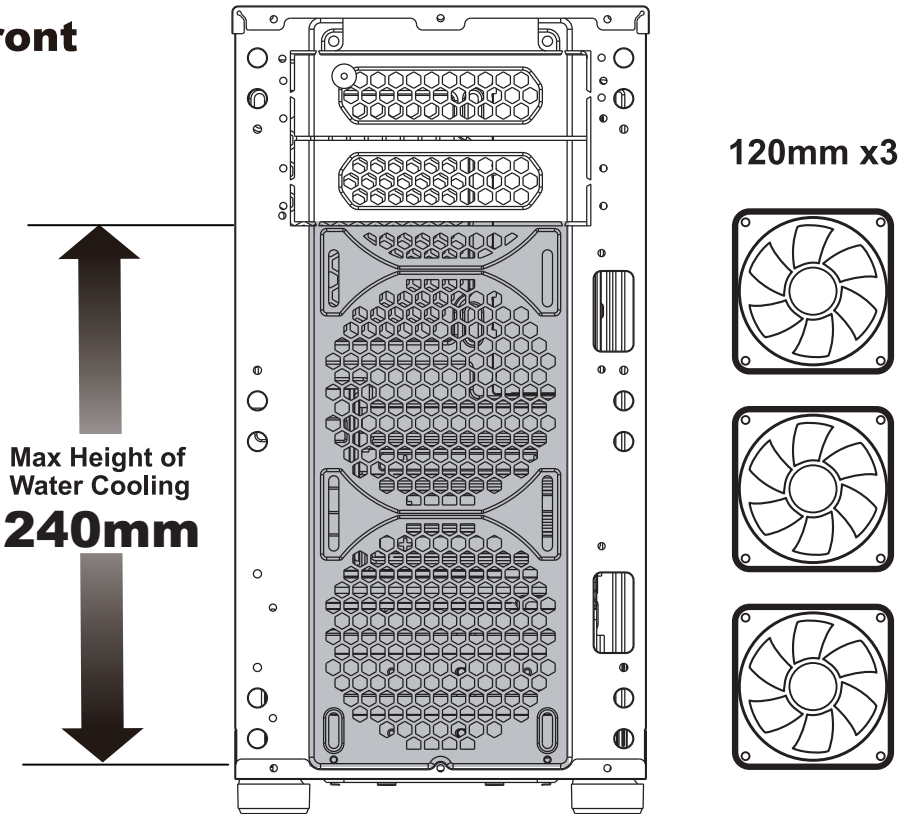

Top

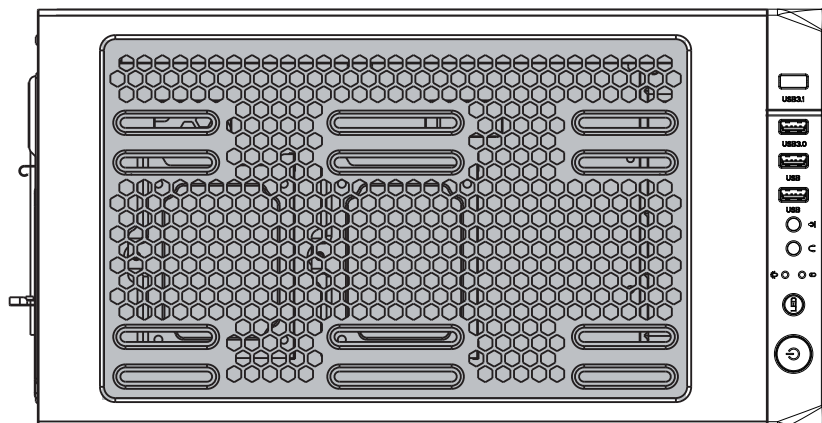





120mm x2

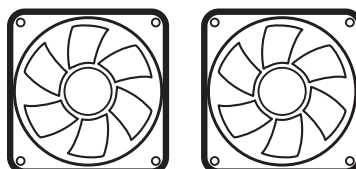


Cooling System Installation

Move HDD cage to install the fan on the front panel


Move HDD cage to install the Radiator and fan on the front panel

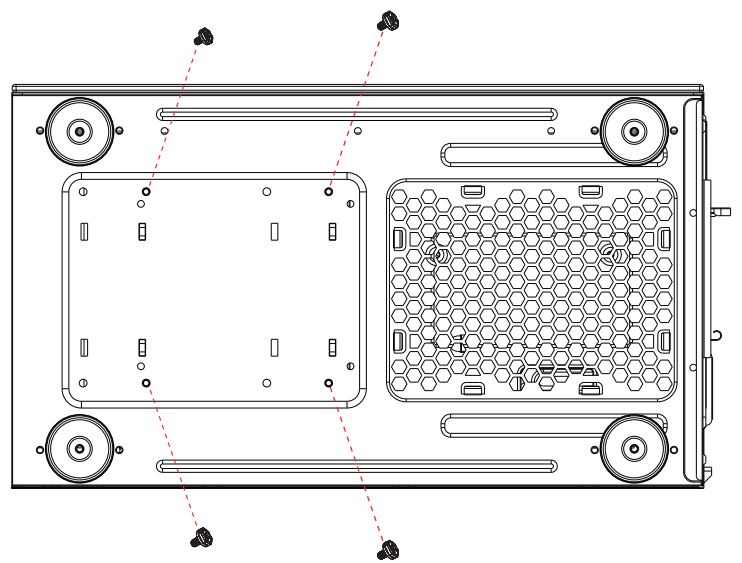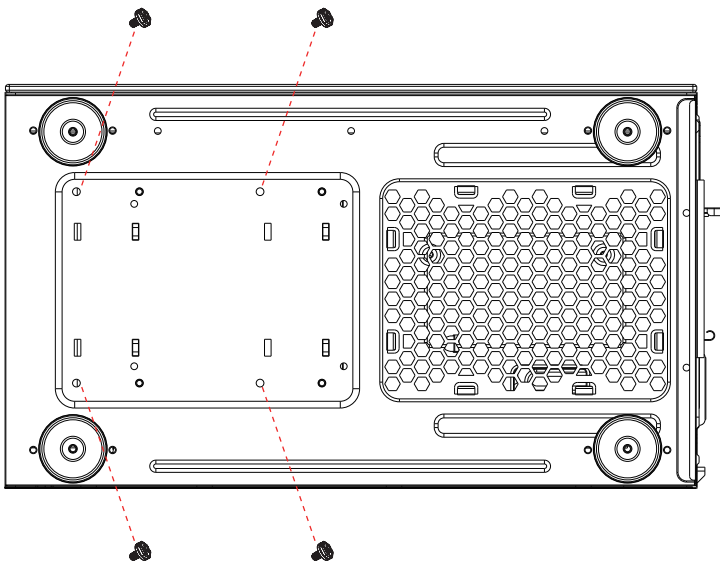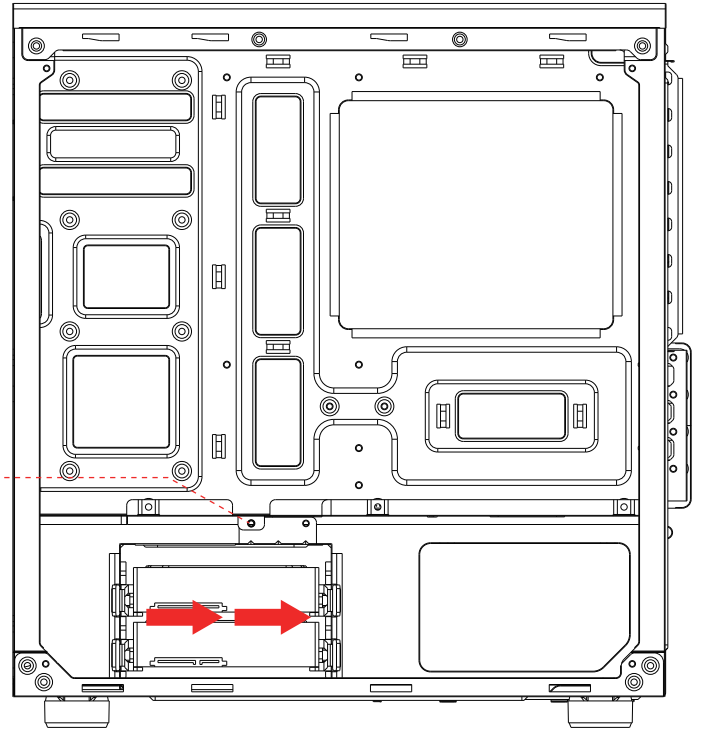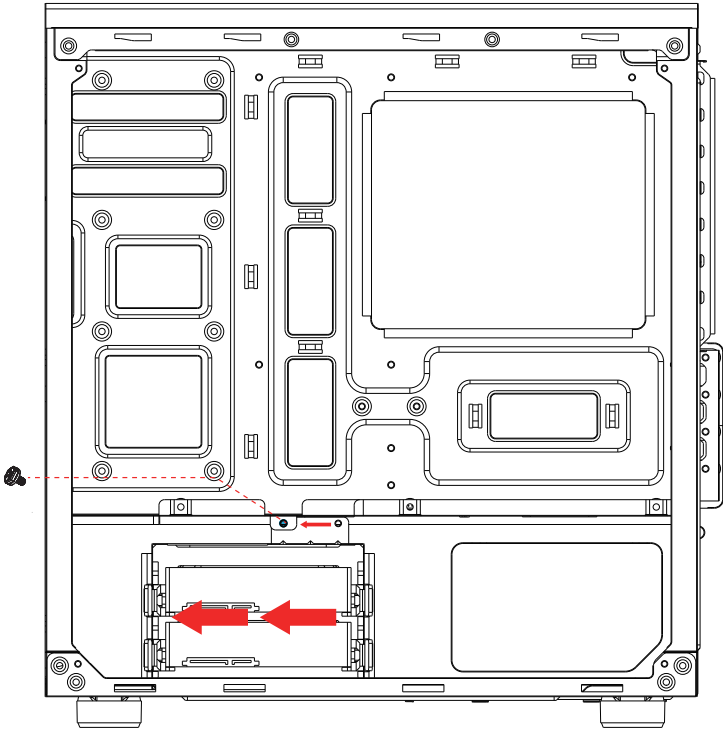

Remove the Front Panel Instructions

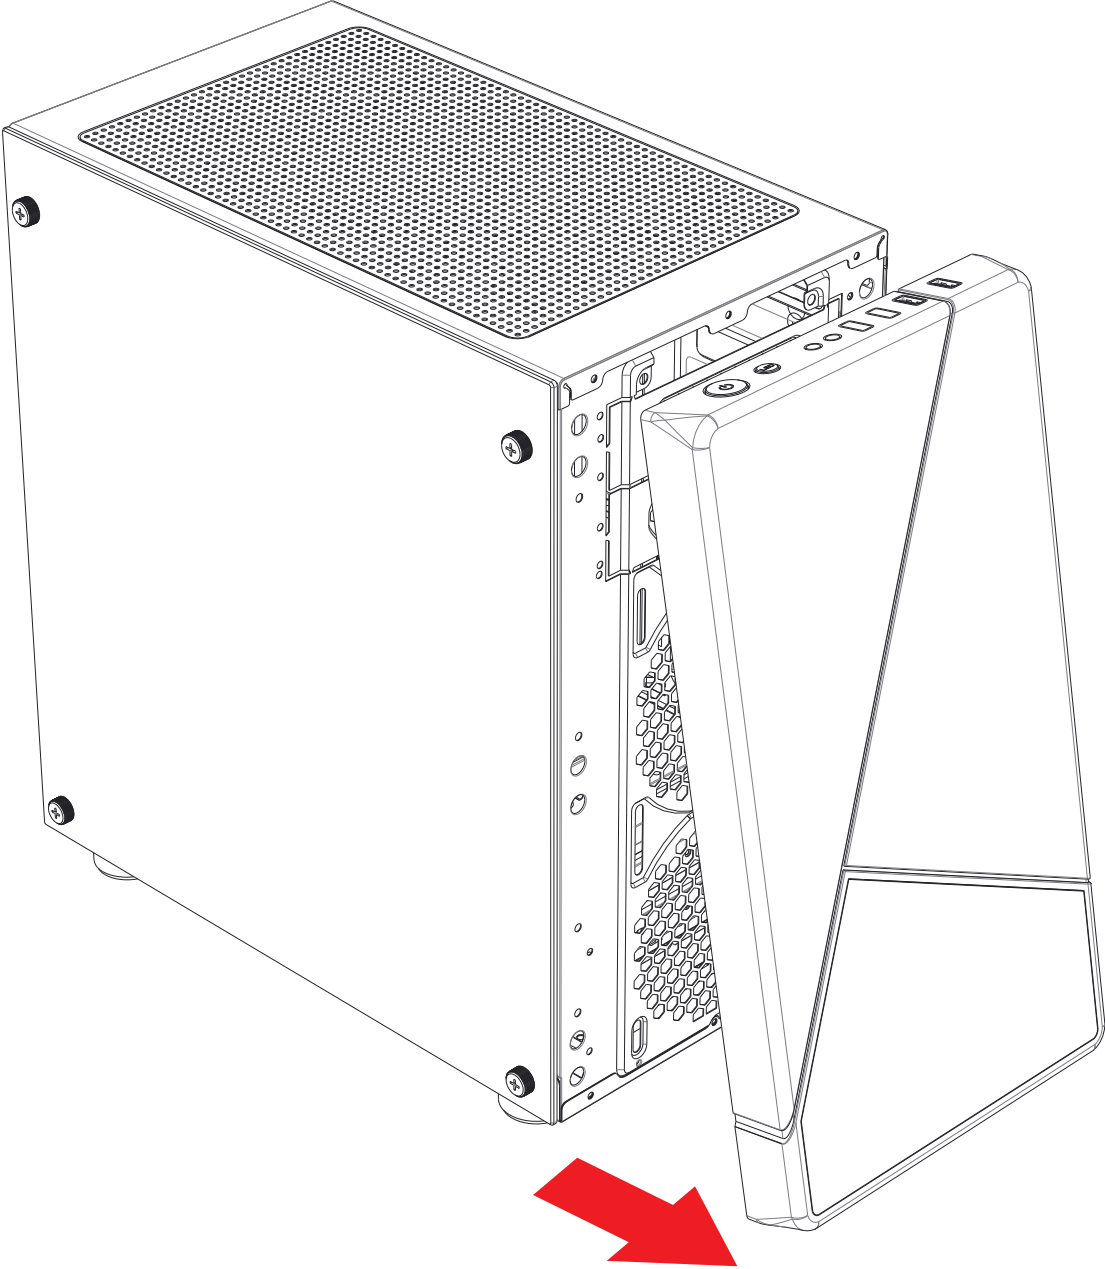


RGB Lighting Switching

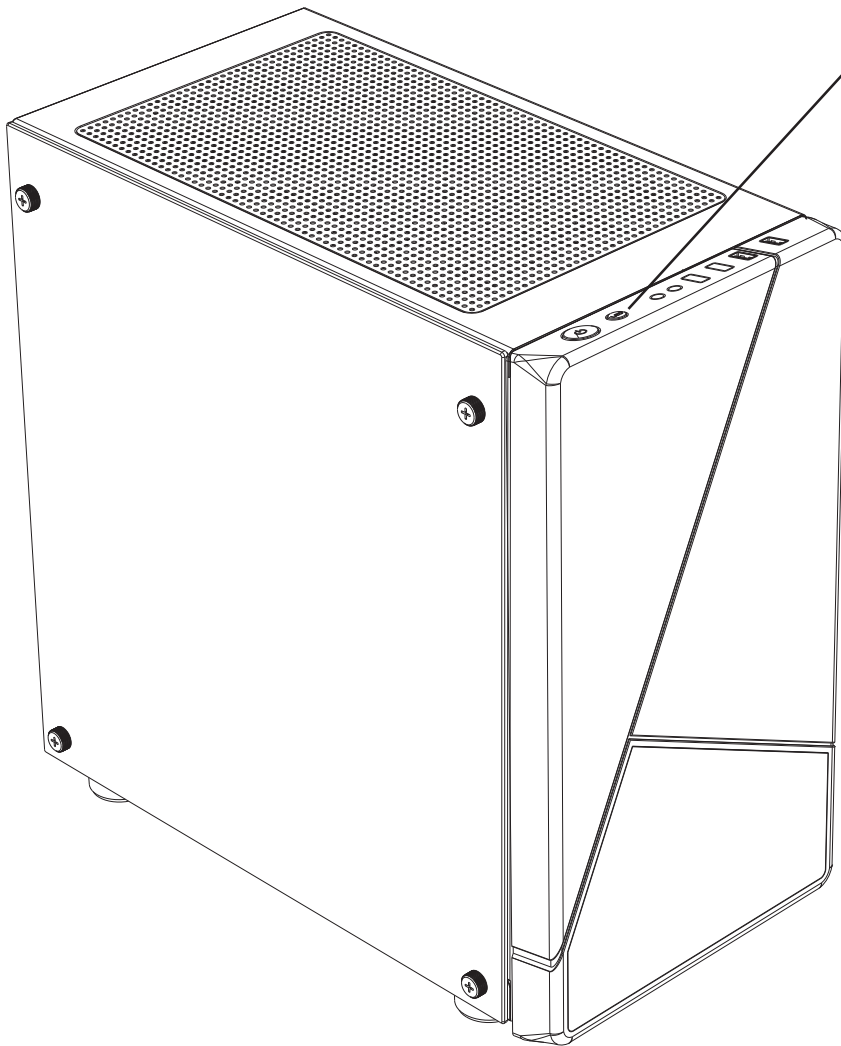

- Press the LED button to cycle through different RGB lighting modes.

Fan Installation

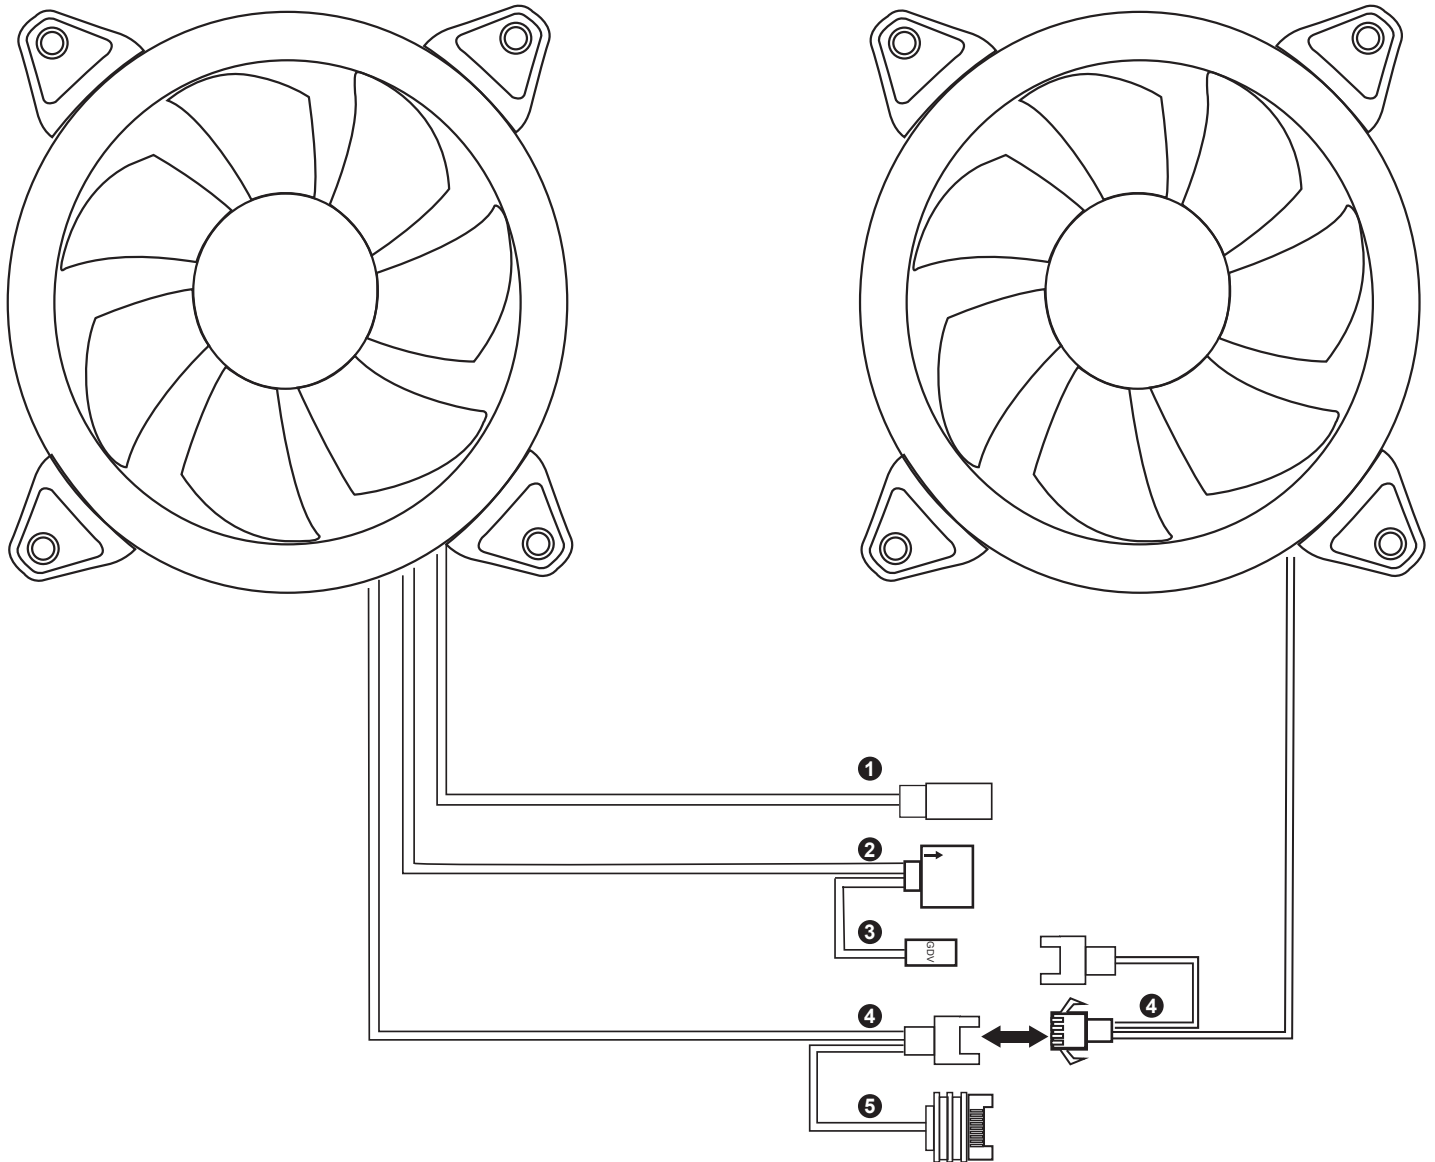

	CONNECTOR	CONNECTION
①	LED S/W (2pin)	LED Botton
②	ARGB LED 5V (3pin)	Motherboard: MSI™, ASUS™ and ASROCK™
③	ARGB LED 5V (VDG)	Motherboard: Gigabyte™
④	Fan Connector	1st fan connect to 2nd fan
⑤	SATA	Power Supply

※ Press the LED button to cycle through different RGB lighting modes, controlled by the LED button.

※ Hold the LED button for 3 seconds to switch the RGB control function between motherboard RGB software and LED button.

