



TEST REPORT

DEKRA Testing and Certification (Shanghai) Ltd
5F, 217# Jiangchangsan Road, Shibe Hi-Tech
Park, Shanghai, P.R.C. (200436)
Tel.: +86 21 6056 7666
Fax: +86 21 6056 7555

Contact
Mr. Halo Sheng
Tel: 021-60507666*7732
E-Mail: Halo.Sheng@dekra.com
Report Issue Date: 2020.03.20
Page 1 of 8

Test Report No. : 6070683.50QS
Project no. : 6070683

Client : Bestway (Hong Kong) International Ltd.
Suite 713, 7/Floor, East Wing, Tsim Sha Tsui Centre, 66 Mody Road, Kowloon,
Hong Kong.

Date sample received : 2020.01.08 / 2020.03.12

Product : LED Light

Product description : Please refer to next page(s).

Model : 58471/60302
58492/60303

Test Requested : Test of RoHS conformity (2011/65/EU) and its subsequent amendments
directive (EU) 2015/863.

Test Method : Please refer to next page(s).

Result : Please refer to next page(s).

Conclusion : Requirement passed.

Testing Period : 2020.01.08—2020.03.17

Signed for and on behalf of

DEKRA Testing and Certification (Shanghai) Ltd





Liu YuPing (刘宇平)

Project Manager

Sheng jinghuan (盛景焕)

Test Engineer

Picture of the product

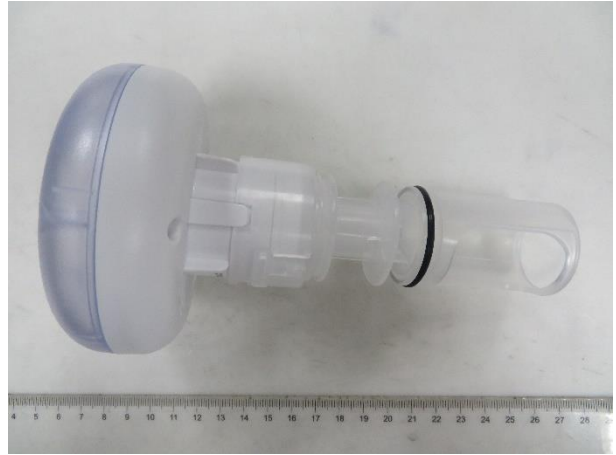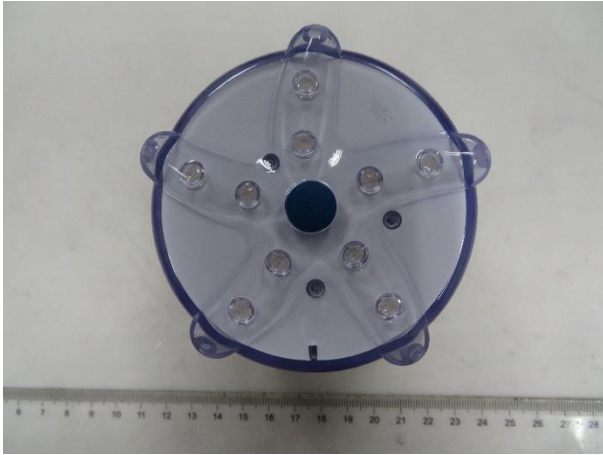

TEST RESULTS

sample-no.	sample designation	Pb (%)	Cd (%)	Hg (%)	Cr VI (%)	PBB (%)	PBDE (%)	DEHP* (%)	BBP* (%)	DBP* (%)	DIBP* (%)
001	silvery metal(screw)	< 0.1	< 0.01	< 0.1	< 0.1	N/A	N/A	N/A	N/A	N/A	N/A
002	silvery metal(screw)	< 0.1	< 0.01	< 0.1	< 0.1 ¹⁾	N/A	N/A	N/A	N/A	N/A	N/A
003	silvery metal(screw)	< 0.1	< 0.01	< 0.1	< 0.1 ¹⁾	N/A	N/A	N/A	N/A	N/A	N/A
004	blue rubber	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
005	transparent plastic	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
006	white plastic	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
007	black rubber	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
008	white plastic	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
009	white plastic	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
010	silvery metal(spring)	< 0.1	< 0.01	< 0.1	< 0.1	N/A	N/A	N/A	N/A	N/A	N/A
011	silvery metal	< 0.1	< 0.01	< 0.1	< 0.1	N/A	N/A	N/A	N/A	N/A	N/A
012	white plastic	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
013	black plastic(capacitance)	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
014	black rubber(capacitance)	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
015	brown paper(capacitance)	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	N/A	N/A	N/A	N/A
016	silvery metal(capacitance)	< 0.1	< 0.01	< 0.1	< 0.1	N/A	N/A	N/A	N/A	N/A	N/A
017	PCB	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1 ²⁾	< 0.1 ²⁾	N/A	N/A	N/A	N/A
018	white LED	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	N/A	N/A	N/A	N/A
019	silvery metal	< 0.1	< 0.01	< 0.1	< 0.1 ¹⁾	N/A	N/A	N/A	N/A	N/A	N/A
020	resistance	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1 ²⁾	< 0.1 ²⁾	N/A	N/A	N/A	N/A
021	IC(PCB)	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	N/A	N/A	N/A	N/A
022	diode(PCB)	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	N/A	N/A	N/A	N/A
023	triode(PCB)	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1 ²⁾	< 0.1 ²⁾	N/A	N/A	N/A	N/A
024	brown capacitance	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	N/A	N/A	N/A	N/A
025	silvery metal(solder)	< 0.1	< 0.01	< 0.1	< 0.1	N/A	N/A	N/A	N/A	N/A	N/A
026	white plastic	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
027	transparent plastic	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
028	transparent plastic	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
029	black rubber	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
030	white plastic	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
031	silvery metal(screw)	< 0.1	< 0.01	< 0.1	< 0.1 ¹⁾	N/A	N/A	N/A	N/A	N/A	N/A
032	blue rubber(switch)	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
033	black plastic(switch)	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
034	white plastic(wire jacket)	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1

035	transparent plastic(LED)	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1 ²⁾	< 0.1 ²⁾	< 0.1	< 0.1	< 0.1	< 0.1
036	PCB	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1 ²⁾	< 0.1 ²⁾	N/A	N/A	N/A	N/A
037	diode	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1 ²⁾	< 0.1 ²⁾	N/A	N/A	N/A	N/A
038	audion	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1 ²⁾	< 0.1 ²⁾	N/A	N/A	N/A	N/A
039	resistance	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	N/A	N/A	N/A	N/A
040	IC(PCB)	< 0.1	< 0.01	< 0.1	< 0.1 ¹⁾	< 0.1 ²⁾	< 0.1 ²⁾	N/A	N/A	N/A	N/A
041	capactiance	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	N/A	N/A	N/A	N/A
042	diode	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	N/A	N/A	N/A	N/A
043	resistance	< 0.1	< 0.01	< 0.1	< 0.1 ¹⁾	< 0.1	< 0.1	N/A	N/A	N/A	N/A
044	silvery metal(solder)	< 0.1	< 0.01 ³⁾	< 0.1	< 0.1	N/A	N/A	N/A	N/A	N/A	N/A
045	coppery metal	< 0.1	< 0.01	< 0.1	< 0.1	N/A	N/A	N/A	N/A	N/A	N/A
046	silvery metal(magnet)	< 0.1	< 0.01	< 0.1	< 0.1 ¹⁾	N/A	N/A	N/A	N/A	N/A	N/A
047	silvery metal	< 0.1	< 0.01	< 0.1	< 0.1 ¹⁾	N/A	N/A	N/A	N/A	N/A	N/A
048	coppery metal	< 0.1	< 0.01	< 0.1	< 0.1	N/A	N/A	N/A	N/A	N/A	N/A
049	white resin	< 0.1	< 0.01	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1

1) The analysis by X-ray fluorescence spectrometry showed a detection for Cr. The verification and quantification of Cr (VI) was performed by photometric analysis.

2) The analysis by X-ray fluorescence spectrometry showed a detection for Br. The verification and quantification of PBB/PBDE was performed by GC-MS.

3) The analysis by X-ray fluorescence spectrometry showed a detection for Cd. The verification and quantification of Cd was performed by ICP-OES.

N/A: Not applicable

*=With reference to IEC62321-8:2017, Analysis was performed by GC-MS.

Description of the analysis procedure (brief version):

Test of RoHS conformity

The measurements are performed according to IEC 62321-3-1 : 2013, "Electrotechnical products - Determination of levels of six regulated substances".

The product is divided in single material samples. The materials are analysed on different parameters of the RoHS-directive to assure that the complete product is RoHS-conform or not. At first a XRF (X-ray fluorescence spectrometry) screening is performed. For every sample following statements can be made.

Table: Screening limits in mg/kg for regulated elements in various matrices

Element	Polymers	Metals	Composite Material
Cd	$BL \leq (70-3\sigma) < X < (130+3\sigma) \leq OL$	$BL \leq (70-3\sigma) < X < (130+3\sigma) \leq OL$	$LOD < X < (150+3\sigma) \leq OL$
Pb	$BL \leq (700-3\sigma) < X < (1300+3\sigma) \leq OL$	$BL \leq (700-3\sigma) < X < (1300+3\sigma) \leq OL$	$BL \leq (500-3\sigma) < X < (1500+3\sigma) \leq OL$
Hg	$BL \leq (700-3\sigma) < X < (1300+3\sigma) \leq OL$	$BL \leq (700-3\sigma) < X < (1300+3\sigma) \leq OL$	$BL \leq (500-3\sigma) < X < (1500+3\sigma) \leq OL$
Br	$BL \leq (300-3\sigma) < X$		$BL \leq (250-3\sigma) < X$
Cr	$BL \leq (700-3\sigma) < X$	$BL \leq (700-3\sigma) < X$	$BL \leq (500-3\sigma) < X$

Below limit (**BL**): the tested material complies to the RoHS directive.

Inconclusive (**X**): If the level of the measurement is around the maximum allowed, or if the level for Chrome or Bromine is too high, other more accurate methods are needed to determine the exact level or the composition of Chrome and Bromine.

Over limit (**OL**): If the level of lead, mercury or cadmium is well above the maximum allowed levels (the XRF uncertainty is taken into account), the tested material does not comply with the RoHS directive.

In case of **inconclusive** XRF results, following analysis procedures are applied:

In order to examine the material samples for the heavy metals cadmium, lead and mercury they are digested in acid and the solutions are used to carry out the analysis for the heavy metals by ICP-OES or atomic-absorption spectroscopy.

Hexavalent chromium is checked by extracting the sample with water at 100 °C (determination of Cr VI in colorless and colored chromate coating on metals) respectively with alkaline extraction at 90-95 °C (determination of Cr VI in polymers and electronic components) followed by photometric analysis.

In the case of metallic components with a surface coating containing hexavalent Chromium (passivation) the concentration is expressed in mg of Chromium VI per component. In order to obtain further information about the concentration on the surface coating it is necessary to know the weight per unit area of the coating and the surface area of the component. Information about surface coatings is to be provided by the client.

The examination for bromine-based flame retardant products is carried out by gas chromatography-mass spectrometry after extraction by solvents; this involves the individual analysis and quantification of the substances specified in the RoHS. The current valid regulations relating to exceptions in respect of the analysed substances are to be taken into account by the client.

The following Polybrominated Biphenyls (PBBs) and Polybrominated Diphenyl Ethers (PBDEs) are analyzed:

2-Bromobiphenyl PBB2, Dibromobiphenyl PBB15, Tribromobiphenyl PBB30, Tetrabromobiphenyl PBB52, Pentabromobiphenyl PBB103, Hexabromobiphenyl PBB153, Heptabromobiphenyl PBB250, Octabromobiphenyl PBB250, Nonabromobiphenyl PBB250, Decabromobiphenyl PBB209, Bromodiphenylether BDE2, Dibromodiphenylether BDE15, Tribromodiphenylether BDE30, Tetrabromodiphenylether BDE62, Pentabromodiphenylether BDE99, Hexabromodiphenylether BDE153, Heptabromodiphenylether BDE183, Octabromodiphenylether BDE203, Nonabromodiphenylether BDE206, Decabromodiphenylether BDE209.

Limits according to RoHS (2011/65/EU) and its subsequent amendments directive (EU) 2015/863 / Test methods (additional chemical analysis):

Parameter	Limits according to RoHS	Test method
Cadmium	0,01 % (100 mg/kg or 0,1 g/kg)	IEC62321-5:2013
Lead	0,1 % (1000 mg/kg or 1 g/kg)	IEC62321-5:2013
Hexavalent Chromium	0,1 % (1000 mg/kg or 1 g/kg)	Metal: IEC62321-7-1:2015 Non-metal: IEC62321-7-2:2017
Mercury	0,1 % (1000 mg/kg or 1 g/kg)	IEC62321-4:2017
PBB and PBDE	0,1 % (1000 mg/kg or 1 g/kg)	IEC62321-6:2015
DEHP	0,1 % (1000 mg/kg or 1 g/kg)	IEC62321-8:2017
BBP	0,1 % (1000 mg/kg or 1 g/kg)	IEC62321-8:2017
DBP	0,1 % (1000 mg/kg or 1 g/kg)	IEC62321-8:2017
DIBP	0,1 % (1000 mg/kg or 1 g/kg)	IEC62321-8:2017

Sample Photos




Test item001




Test item002




Test item003




Test item004




Test item005



Test item006



Test item007



Test item008




Test item009



Test item010



Test item011



Test item012



Test item013




Test item014




Test item015




Test item016




Test item017




Test item018




Test item019




Test item020




Test item021




Test item022




Test item023




Test item024



Test item025




Test item026




Test item027



Test item028



Test item029




Test item030




Test item031




Test item032




Test item033




Test item034




Test item035




Test item036




Test item037




Test item038




Test item039




Test item040



Test item041




Test item042




Test item043




Test item044



Test item045



Test item046



Test item047



Test item048



Test item049

---End of Report---

Please note that every statement made in this report is only valid for the samples tested and reported herein. Samples were provided by applicant. Without consent of the testing organization, this report shall not be reproduced except in full and the clients shall not be unauthorized use of test results for improper propaganda. DEKRA declines any responsibility with deviations required by the customer that may affect the validity of result. The information is provided by the customer in this report may affect the validity of the results; the test lab is not responsible for it. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to calculate the uncertainty associated with the measurement result, unless the specification, standard or customer have special requirements. This report is not used for social proof function in China market