STRONG



ATRIA WI-FI MESH HOME TRIO PACK 1200



Performant - Reliable – Anywhere


Using state of art Easy Mesh solution, STRONG's Wi-Fi Mesh Home Trio Pack 1200 combines Mesh technology with the powerful 802.11ac MU-MIMO Wi-Fi standard for ultimate speed and coverage at home. This package of 3 ATRIA Mesh Extender 1200 replaces your current Wi-Fi network without changing your modem or router. It brings a super-fast and seamless roaming Wi-Fi network at a speed up to 1200 Mbit/s with coverage up to 450m².

The installation is extremely easy with no configuration and requires no expertise, the kit is ready to use. You simply connect one Mesh Extender 1200 to your existing modem via an Ethernet port and then position the second Mesh Extender 1200 in the room of your choice. Depending on the size of your house, you can add up to 3x additional Mesh Extender 1200 (up to 6x Mesh Extender 1200 cover an area of up to 900m²).

Manage your Wi-Fi Mesh network at a finger touch with the STRONG App available for Android and iOS devices.





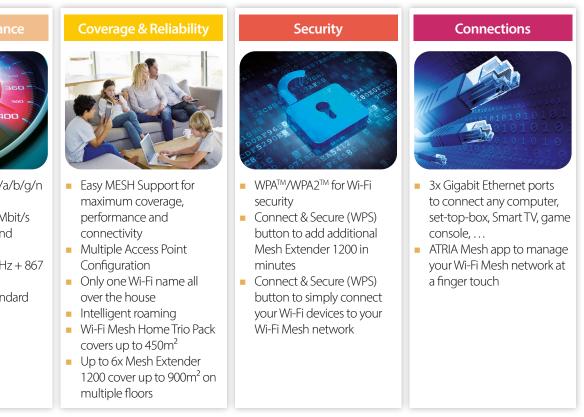

Wi-Fi performance



- Supports 802.11ac/a/b/g/n standards
- Speed up to 1200 Mbit/s
- MU-MIMO dual band concurrent
- 300 Mbit/s @ 2.4 GHz + 867 Mbit/s @5 GHz
- Works with any standard modem or router

STRONG

WI-FI MESH HOME TRIO PACK 1200

Wi-Fi

Frequency Standards

Signal Rate Security Antenna Transmit Power Supported Channels 2.4 GHz and 5 GHz concurrent IEEE 802.11ac/n/g/b/a, IEEE 802.11d, IEEE 802.11h, IEEE 802.11e, IEEE 802.11i 5 GHz: Up to 867 Mbit/s 2.4 GHz: Up to 300 Mbit/s WPA/WPA-PSK & WPA2/WPA2-PSK 4x internal antennas Europe: <20 dBm (2.4 GHz), <23 dBm (5 GHz) 5 GHz: 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112 2.4 GHz: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13

Android and iOS downloadable app to manage

the Wi-Fi Mesh network

Mach tachnalagu

	Mesn technology	
	Easy MESH Support	Automatically Organized Network
٦,		Auto Configuration
		Seamless Roaming
		Auto MESH Routing
		Auto Healing (Redundancy and Fail-over)
		Intelligent roaming (Dynamic management of clients and clients frequency bands)
	Multiple access point architecture (up to 6x Mesh Extender 1200)	
	Only one Wi-Fi name all over the house (configuration sharing)	

~220 g

Hardware Other specifications Main Chipset RTL8197FS Certification CE Wi-Fi Chipset RTL8812FR for 5GHz Power consumption per unit < 8WEthernet Ports 3x 10/100/1000M WAN/LAN ports (Auto MDI/ Package contents 3x Mesh Extender 1200 MDIX) 3x Power Supply Units (12 V/1 A DC) Button Connect & Secure (WPS), Reset 3x CAT5E Ethernet Cable LEDs Power, WAN, Pairing 1x Installation Instructions, Warranty Card Power External power supply, 12 V/1 A DC Internet Browser System Requirements Standards IEEE 802.3, IEEE 802.3u, IEEE 802.3ab Software Environment Basic Network DHCP, DNS, IGMP v1/v2, NAT, IPV4/V6, WDS, WPS, Operating temperature: 0° C~+45° C WMM Storage temperature: -20° C~+70° C Web User Interface, Time Settings, Configuration Management Operating humidity: 10%~90% non-condensing Backup/Restore, Firmware Upgrade, System Log Storage humidity: 10%~90% non-condensing Internet Protocol IPv4/V6 Dimensions (WxDxH) per unit 130*130*30 mm


Power LED 1.

STRONG Mesh app

- Internet LED 2.
- Paring LED 3.
- Connenct & Secure (WPS) button 4
- 5. 3x Gigabit LAN/WAN Ethernet ports
- 6 Reset button
- 7. Power supply connector



Weight per unit



www.strong.tv