

PowerWalker Inverter 650 SW


- Smart battery charger to extend battery life with intelligent fan control for reduced noise level
- Compact and lightweight
- Pure Sine Wave for wide range of applications and harsh environment
- Dedicated Battery Packs available with 55Ah and 100Ah batteries



PowerWalker Inverter SW is designed to provide reliable backup power protection for an extended period of time. Despite its compact size, the Inverter features advanced functions like Pure Sine Wave output and a strong charger.

It is paired with one of the dedicated battery packs (available with 55Ah or 100Ah batteries) allowing maximum availability for your home appliances, heating systems, small pumps and motors etc.

APPLICATION

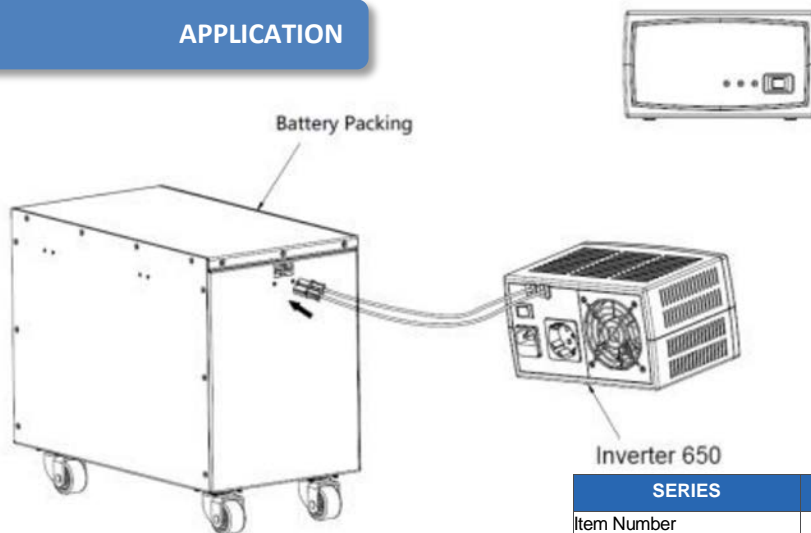

TECHNICAL SPECIFICATION

BACKUP TABLE

Estimated Backup Time for Inverter 650 SW			
	100W	200W	300W
With 55Ah battery	240min	90min	45min
With 100Ah battery	480min	210min	110min

SERIES	Inverter 650 SW
Item Number	10120220
EAN	4260074981100
INPUT	
Power capacity	650VA / 325W
Voltage Range	Wide range: 100-280 VAC Narrow range: 190-260 VAC
Frequency Range	40Hz or 50Hz
OUTPUT	
Voltage Regulation	230VAC ± 10%
Pure Sine Wave Output	Yes
Outlets	Schuko outlet
Transfer Time	Typical 14ms
COMMUNICATION AND CONNECTIONS	
LED	Warning, Battery Mode, Normal
Switch	On/Off switch, Charger switch
BATTERIES	
Batteries	12V (single battery string)
Recharge Time	Depends on the battery
Charger	15A self-adjustable
Dimensions	146mm x 205mm x 113mm
Weight	4kg

