

Computer power supply Model: AK-B1-400







Product code	AK-B1-400
Product type	Computer power supply
Format	ATX 2.31
Series	Basic
Supply voltage	230 V
Power consumption	< 5 A
Efficiency	> 70 %
80 PLUS compatibility	No
Current on the +3.3V rail	23 A
Current on the +5V rail	25 A
The combined power of $+3.3V$ and $+5V$	190 W
Current on the +12V rail	18 A
Maximum load on 12V line	216 W
Maximum power	400 W
Mainboard Power Connector	20+4 pin
Power connector ATX12V P4	1 pc
Power connector EPS12V 8 pin	None
Power connector PCI-E 6 pin	None
Power connector PCI-E 6+2 pin	None
Power connector PCI-E 8 pin	None
Molex connector	2 pcs
Mini- Molex connector	None
SATA connector	3 pcs
PFC filter	Passive
Mechanical switch	Yes
Ground wire	Yes
OVP	Yes
OCP	Yes
OPP	Yes
OTP	Yes
SCP	Yes
UVP	Yes
Power supply connector	IEC C14
Fan size	120 mm
Fan adjustments	Automatic
Cable length	30 - 45 cm



Power cable included	No
Material	Galvanized steel
Product color	Grey
MTBF	100000 h
Temperature	5-50°C
Package	Foil
Product size (L x W x H)	140 x 150 x 85 mm
Package size (L x W x H)	190 x 151 x 86 mm
Net weight	1.03 kg
Gross weight	1.03 kg
CE compatibility	Yes
FCC compatibility	No
RoHS compatibility	Yes
REACH compatibility	Yes
EAN code	5901720130303




























Description

Akyga **ATX** power supply **400W** Basic series is one of the fundamental power supplies in our offer dedicated to power desktop computers.

Product is made of high quality components. The power supply has a **3x SATA** connectors, **2x MOLEX** connectors, **P4 4pin** connector and a universal **20+4-pin** motherboard connector. Supports **ATX 12V 2.0** specifications, so it can be used with current and next generation of platforms with multi-core processors. Efficient, quiet fan with automatic speed control and a diameter of **120 mm** ensures effective cooling. The power supply has a manual switch that allows the user to safely cut off power without having to disconnect the cord from the network. High efficiency **above 70%** allows effective supplying and so the stable operation of the power supply affects the reliability of all components of the computer.

An important aspect is the presence of several important protectors (OVP, OCP, OPP, OTP, SCP) and **PFC filter** that protects and prevents motherboard, processor and other parts from damage and stabilize the operation of the power supply so that it works without any unwanted interference.

Cable map

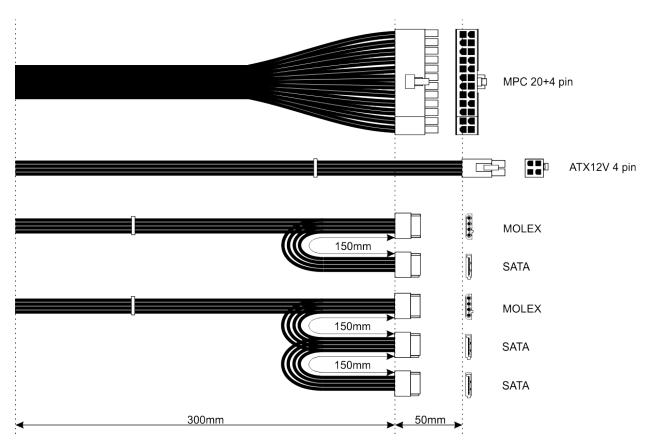



Nameplate

Professional Power S	upply Solu	tions		AT	X12V v2.3′	AK-B	1-400
AC INPUT	230V / 50Hz / 5A						
DC OUTPUT	+3,3V	+5V	+12V	-12V	+5VSB	2	
MAX CURRENT	23A	25A	18A	0,5A	2,5A		0
MAX COMBINED	190W		216W	18,5W			S
TOTAL POWER	400W					ŏ	4
MAX COMBINED		190W 2				00	ASIC