


# PRODUCT DATASHEET

## Vintage 1906 GLOBE 16 4 W/1800 K E27

Vintage 1906® LED | LED lamps, vintage edition

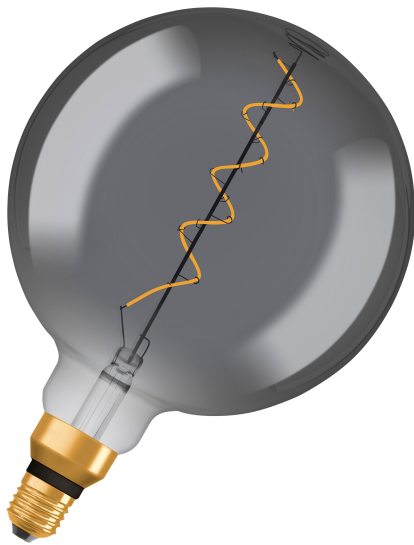

---

### Areas of application

- Perfect for decorative installations
- Domestic applications
- General illumination
- Outdoor use in outdoor luminaires only (minimum IP65)

---

### Product benefits

- Very low energy consumption
- Instant 100 % light, no warm-up time
- Can be easily fitted instead of ordinary light bulbs
- Lamps with innovative LED "filament" technology

---

### Product features

- LED lamps for line voltage
- Lamp made of glass
- Lifetime: up to 15,000 h
- Beam angle: up to 360°
- Good quality of light; color rendering index  $R_a \geq 80$ ; constant chromaticity




TECHNICAL DATA

Electrical data

Nominal wattage	4 W
Construction wattage	4.00 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	16 W
Nominal current	32 mA
Type of current	AC
Inrush current	1.5 A
Operating frequency	50...60 Hz
Mains frequency	50...60 Hz
Max. lamp no. on circuit break. 10 A (B)	400
Max. lamp no. on circuit break. 16 A (B)	480
Power factor $\lambda$	> 0.50

Photometrical data


Luminous flux	150 lm
Nominal useful luminous flux 90°	110 lm
Luminous efficacy	37 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm Comfort Light
Color temperature	1800 K
Color rendering index Ra	≥80
Light color	818
Standard deviation of color matching	≤6 sdc <sub>m</sub>
Rated LLMF at 6,000 h	0.80
Flickering metric (Pst LM)	1.0
Stroboscope effect metric (SVM)	0.9



### Light technical data

Beam angle	330 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Rated beam angle (half peak value)	330.00 °

### Dimensions & Weight



Overall length	287.00 mm
Diameter	200.00 mm
Maximum diameter	200 mm
Product weight	275.00 g

### Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	65 °C

### Lifespan

Nominal lamp life time	15000 h
Number of switching cycles	100000
Lumen maintenance at end of serv	0.70
Rated lamp survival factor at 6,000	≥ 0.90

### Additional product data

Base (standard designation)	E27
Mercury content	0.0 mg
Mercury-free	Yes

Design / version	Clear
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

### Capabilities

Dimmable	No
----------	----

### Certificates & Standards

Energy efficiency class	G 1)
Energy consumption	4.00 kWh/1000h
Type of protection	IP20
Standards	CE / EAC
Photobiological safety group acc. to EN62778	RG1

1) Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

### Country-specific categorizations



Order reference	1906LEDBGLB 4W/
-----------------	-----------------

### Energy labelling regulation data acc EU 2019/2015

Lighting technology used	LED
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	E27
Connected light source (CLS)	No
Color-tunable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Correlated colour temperature type	SINGLE_VALUE
Claim of equivalent power	Yes
Length	287.00 mm
Height	200.00 mm
Width	200.00 mm
Chromaticity coordinate x	0.549
Chromaticity coordinate y	0.408

R9 Colour rendering index	0.00
Beam angle	SPHERE_360
Survival factor	0.90
Displacement factor	0.40
LED light source replaces a fluorescent light source	not applicable
EPREL ID	523248
Model number	AC32474

## DOWNLOAD DATA

DOWNLOAD DATA	
	PRODUCT DATASHEET 1906 LED GLOBE 12 5 W 1800K E27
	Declarations of conformity EC Declaration of Conformity Classic G lamp

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075269927	Folding box 1	225 mm x 225 mm x 356 mm	460.00 g	18.02 dm <sup>3</sup>
4058075269934	Shipping box 4	474 mm x 474 mm x 388 mm	2855.00 g	87.17 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.