

Delock Adapter cable USB Type-A to Serial RS-232 RJ12 with ESD protection APC 2 m

Description

This USB to serial RS-232 RJ12 adapter cable by Delock is suitable for controlling and monitoring the rack power distribution units and rack transfer switches from APC.


Compatible Devices:

Rack Power Distribution Units:

AP78xx, AP79xx, AP86xx, AP88xx, AP89xx

Rack Automatic Transfer Switches:

AP7752, AP7752, AP7730, AP7732, AP7721, AP7723

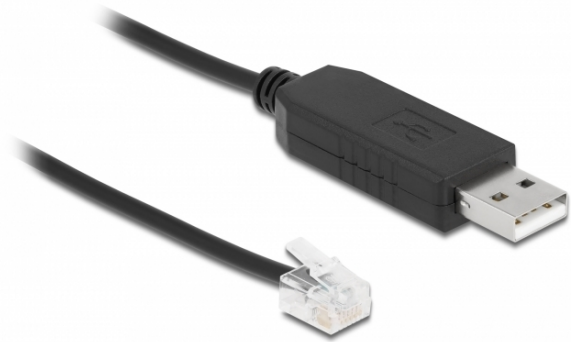

2 m

Specification

- Connectors:
 - 1 x USB 2.0 Type-A male
 - 1 x Serial RS-232 RJ12 plug
- Chipset: FTDI FT231X
- Plug & Play
- FIFO: 512 Byte - TX
- FIFO: 512 Byte - RX
- Compatible with USB 3.0, USB 2.0, and USB 1.1 full speed 12 Mbps
- Data transfer rate up to 230.4 Kb/s
- Signals: GND(2), RXD(3), TXD(4), GND(5)
- ESD protection IEC 61000-4-2
 - HCP & VCP: ± 4 kV
 - Air Discharge: ± 8 kV
 - Contact Discharge: ± 4 kV
- Colour: black
- Cable length incl. connectors: ca. 2.0 m
- Suitable for various devices from APC

System requirements

- Windows 8.1/8.1-64/10/10-64
- PC or laptop with a free USB Type-A port

Package content

- Adapter cable USB 2.0 Type-A to RS-232 RJ12

Item no. 66736

EAN: 4043619667369

Country of origin: China

Package: • Zip poly bag

Images



General	
Specification:	RS-232 (EIA / TIA) USB 2.0
Supported operating system:	Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Interface	
Connector 1:	1 x USB 2.0 Type-A male
Connector 2:	1 x RJ12 plug
Technical characteristics	
Chipset:	FTDI FT231XS
Data transfer rate:	bis zu 230,4 Kbps
FIFO:	2 x 512 Byte
Signal transmission:	TxD, RxD und GND
UART:	USB to serial UART
Physical characteristics	
Cable length incl. connector:	2 m
Colour:	black
Overvoltage protection:	±8 kV EN / IEC 61000-4-2 Contact Discharge ±4 kV EN / IEC 61000-4-2 Contact Discharge ±4 kV EN / IEC 61000-4-2 VCP & HCP