


1200 W / 1000W / 850 W / 750 W / 650 W



**PRIME**  
PLATINUM

### SPECIAL FEATURES

- ❖ Ultra-High Efficiency, 80 PLUS® Platinum Certified
- ❖ Micro Tolerance Load Regulation
- ❖ Top-Quality 135 mm Fluid Dynamic Bearing Fan
- ❖ Premium Hybrid Fan Control
- ❖ Cable-free Connection Design
- ❖ Fully Modular Cabling Design
- ❖ Multi-GPU Technologies Supported
- ❖ Gold-Plated High Current Terminals

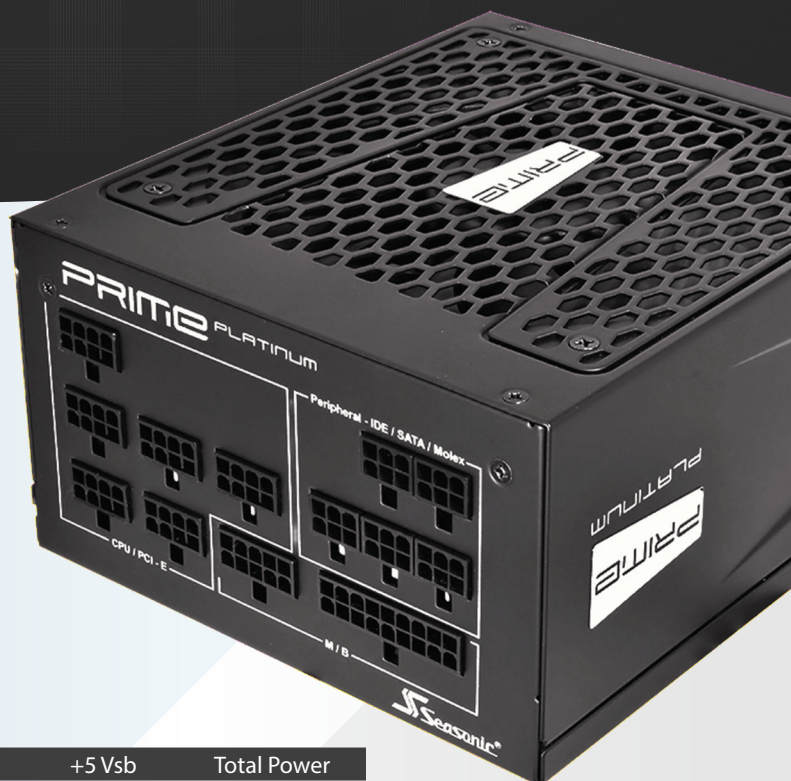

### POWER DISTRIBUTION

Model	+3.3 V	+5 V	+12 V	-12 V	+5 Vsb	Total Power
<b>PRIME 1200</b> Platinum	25 A	25 A	100 A	0.3 A	3 A	1200 W
		125 W	1200 W	3.6 W	15 W	
<b>PRIME 1000</b> Platinum	25 A	25 A	83 A	0.3 A	3 A	1000 W
		125 W	996 W	3.6 W	15 W	
<b>PRIME 850</b> Platinum	20 A	20 A	70 A	0.3 A	2.5 A	850 W
		100 W	840 W	3.6 W	12.5 W	
<b>PRIME 750</b> Platinum	20 A	20 A	62 A	0.3 A	2.5 A	750 W
		100 W	744 W	3.6 W	15 W	
<b>PRIME 650</b> Platinum	20 A	20 A	52 A	0.3 A	3 A	650 W
		100 W	648 W	3.6 W	15 W	



### WIRE CONFIGURATION

Model	Cable					
	Main Power (24P / 20P) 610 mm	EPS 12 V / ATX 12 V (8P / 4P) 650 mm	PCI-E (8P / 6P)	SATA	Peripheral (4P)	FDD (4P)
<b>PRIME 1200</b> Platinum	1	2	8	12	5	1
<b>PRIME 1000</b> Platinum	1	2	8	12	5	1
<b>PRIME 850</b> Platinum	1	2	6	10	5	1
<b>PRIME 750</b> Platinum	1	2	4	8	3	1
<b>PRIME 650</b> Platinum	1	1	4	6	3	1



Safety & EMI / EMC

Protection Features: OPP / OVP / UVP / SCP / OCP / OTP

Dimensions: L 170 x W 150 x H 86 mm



Specifications may change without prior notice



**Headquarters** Tel: +886-2-2659-0338 | Fax: +886-2-2659-0530 | sales@seasonic.com | www.seasonic.com  
**USA** Tel: +1 626-969-9966 | Fax: +1 626-969-9986 | ssa.sales@seasonic.com  
**Europe** sse.sales@seasonic.com  
**Japan** Tel: +81-3-6805-4085 | ssj.sales@seasonic.com